BPV800 | Lacing Project Assortment Craft Kit (Pk/50)

MAKING IT EASY to SAVE MORE on your next order!

$10 OFF
Your Next Order of only $39.00 or more.

Please mention Offer Code: **M2467**
Minimum order $39 excludes shipping and taxes.
Limit one per order.
May not be combined with other offers or bid or contract pricing.
See current S&S® catalog or Help at ssww.com for Offer Terms and Conditions.
We reserve the right to terminate this offer at any time without notice.

Call Toll-Free
1-800-243-9232

Online:
ssww.com

Customer Service:
1-800-937-3482

Email:
cservice@ssww.com

FAX:
1-800-566-6678

S&S® Worldwide

© Copyright 2012 S&S® Worldwide Inc. All rights reserved. No part of this project may be copied or duplicated without the express written permission of S&S Worldwide.

Reorder Number
BPV800 | **1.1**

S&S® Worldwide
MAKING IT EASY
to Help People Play and Learn

Gee-Perz®
Just Add Imagination... We Provide the Rest!

Lacing Project Assortment Craft Kit (Pk/50)

PLEASE READ ALL INSTRUCTIONS BEFORE STARTING

YOUR KIT CONTAINS:
- Vinyl Pieces
- Plastic Lacing
- Frame Backs
- Combs
- Ball Chains
- Plastic Table Cover

AGE GROUP: 8 and up
PREP TIME: 5 minutes
PROJECT TIME: 45 minutes

BPV800

INSTRUCTIONS:

Helpful Hints:
After cutting lace to the required length, cut one end to a long point for the working end. This will make it easier to lace through the holes.

When lacing, make sure that the lace does not twist. If lace should twist, run lace between the thumb and finger from the project down to the end.

Pull lace snug, using the same amount of tension on each stitch. When going around corners, lace twice in corner hole.

Whip Stitch: Requires approximately 3 inches of lacing for every inch of edge to be laced.

1. Line up your project, holding it with the front facing toward you. Start lacing at the least noticeable place (see Figure A).

2. At the starting hole, push lacing through from front to back leaving a 1” tail. Continue by bringing working end over and through the next hole (see Figure B).

3. Finish by pushing working-end through the starting hole. Then from in between the parts, pull both the tail and the working end out and run them under several stitches. Cut off extra lace (see Figure C).

FIGURE A

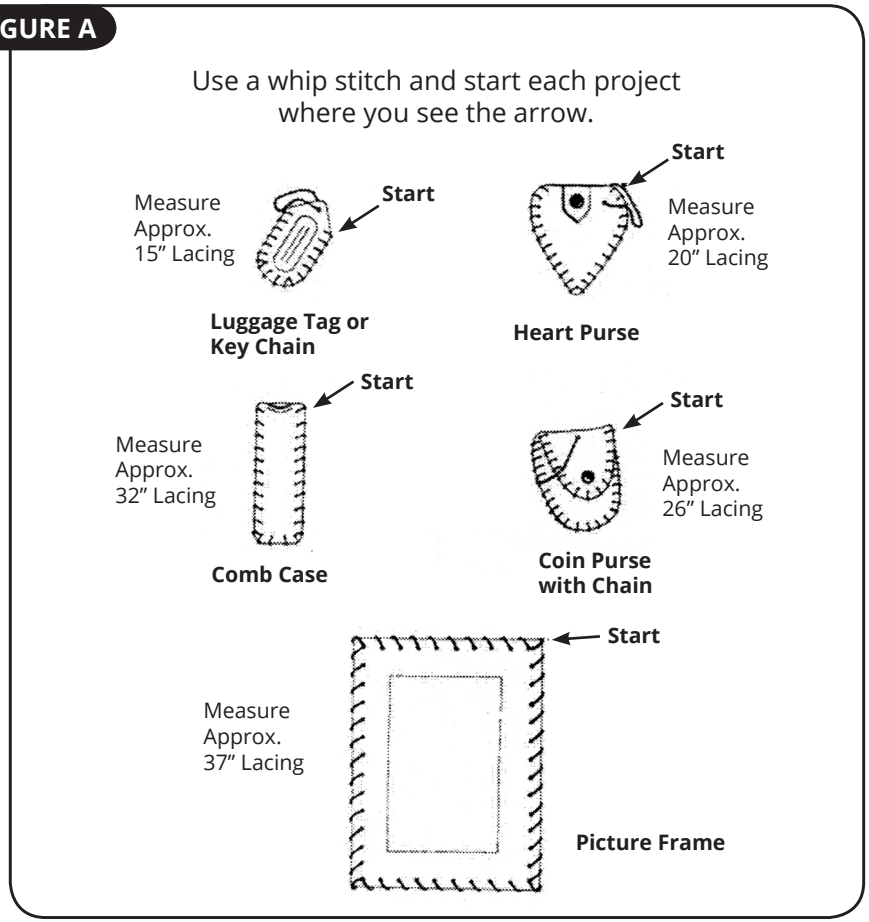

FIGURE B



FIGURE C