General Wood Instructions

Sanding
The rule of sanding is “Never across the grain”.
1. Do not tear sandpaper. If you do, the ragged edges will often scratch the wood surface.
2. For flat surfaces, wrap a piece of sandpaper around a block of wood or use a store bought holder. Start with a coarse grade of paper and finish with a fine grade of paper(not included).
3. Be consistent. Do not sand one are with fine and another with coarse grade.

Staining
1. Be sure the wood surface is smooth and clean. Stains can accentuate any roughness or scratches of cross grain sanding. Wipe off any dirt or dust with a soft cloth.
2. A base coat of sealer/primer and a light sanding before applying stain will insure a uniform stain.
3. Apply stains in one direction following the wood grain. Use a soft brush or foam brush. Let the stain penetrate the wood, then wipe off excess stain with a soft cloth.
4. If stain looks too dark, dampen the cloth with water/thinner and wipe until you achieve the desired color. If stain is too light, let dry, then apply another coat of stain and wipe off.

Finishes
1. Outdoor projects may be finished with polyurethane or varnish.
These are toxic and must be used in a well ventilated area. Indoor projects may be finished with decoupage or left unfinished.

Customer Appreciation Special

SAVE MORE! SAVE!

$10 OFF
Your Next Order of only $39.00 or more.

Please mention Offer Code: **M2467**

Minimum order $39 excludes shipping and taxes. Limit one per order.
May not be combined with other offers or bid or contract pricing.
See current S&S® catalog or Help at ssww.com for Offer Terms and Conditions.
We reserve the right to terminate this offer at any time without notice."

SAVE MORE! SAVE!

Heart Jewelry Holder Item# WD928

CALL TOLL-FREE 1-800-243-9232 or **Mail Your Order** to:
S&S® Worldwide
PO Box 513
Colchester, CT 06415-0513
FAX #: 1-800-566-6678 Customer Service: 1-800-937-3482
Internet home page address: http://www.ssww.com
Email address: service @ssww.com

© Copyright 2007 S&S Worldwide Inc. All rights reserved. No part of this project may be copied or duplicated without the express written permission of S&S Worldwide.

Item No. WD928

Made in China

Heart Jewelry Holder

PLEASE READ ALL INSTRUCTIONS BEFORE STARTING

- ✔ 1 Wood Heart
- ✔ 1 Wood Base w/ Holes
- ✔ 1 Wood Peg
- ✔ 4 Wood Dowels
- ✔ 3 Cup Hooks
- ✔ 1 Sheet Sandpaper
- ✔ Instructions

YOU WILL NEED...

Protected Work Surface	Paint Brushes
Soft Cloth	Ruler
Paint or Stain	Glue

S&S® Worldwide

Safety First!

This Product May Contain Silicon Gel Packets.
REMOVE PRIOR TO USE!

Product Instructions:

1. Sand all wood parts until smooth. Test fit the peg into the holes in the bottom of the heart and center of the base. Test fit the dowels into the holes in the base. Sand the dowels and peg, if necessary, so they fit into the holes easily. Remove dust with the cloth.

2. Stain or paint your project. A combination of stain and paint looks nice. Let dry 30 minutes.

3. Apply a small amount of glue into the four small holes in the base. Push the dowels into the holes so the ends are even with the bottom of the base. Wipe away any excess glue.

4. Apply glue to the inside of the hole in the center of the base. Slide the peg into the hole so it extends 1/16" out from the bottom of the base. This will allow the base to spin on the center peg. Wipe away any excess glue. Let dry 20 minutes.

Item # WD928

FIGURE A

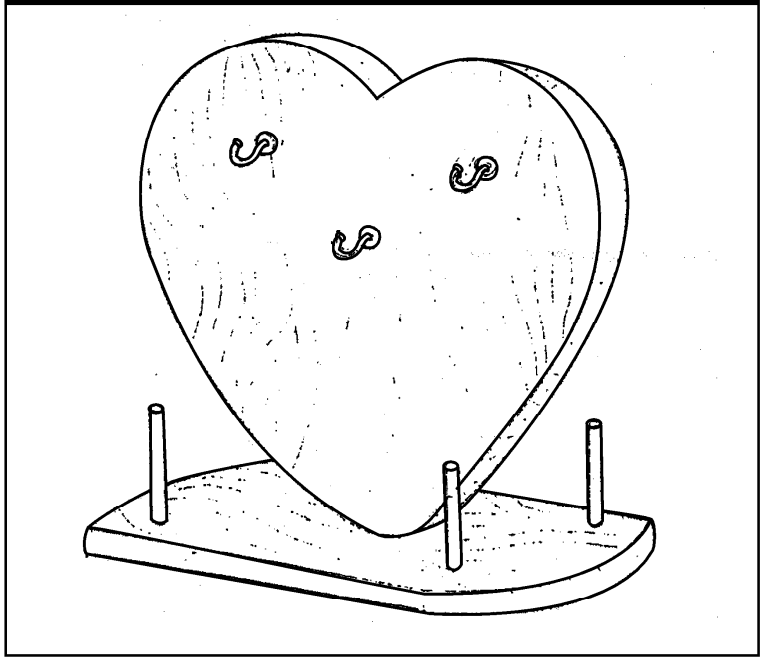

5. Screw three cup hooks into the side of the heart.

6. Apply glue into the hole in the bottom of the heart. Push the heart onto the top of the center peg. Wipe off any excess glue. Let dry 20 minutes.